


# UNIQ<sup>®</sup> LIGHT 960

Blend Light Stabilizer in solventborne and waterborne system

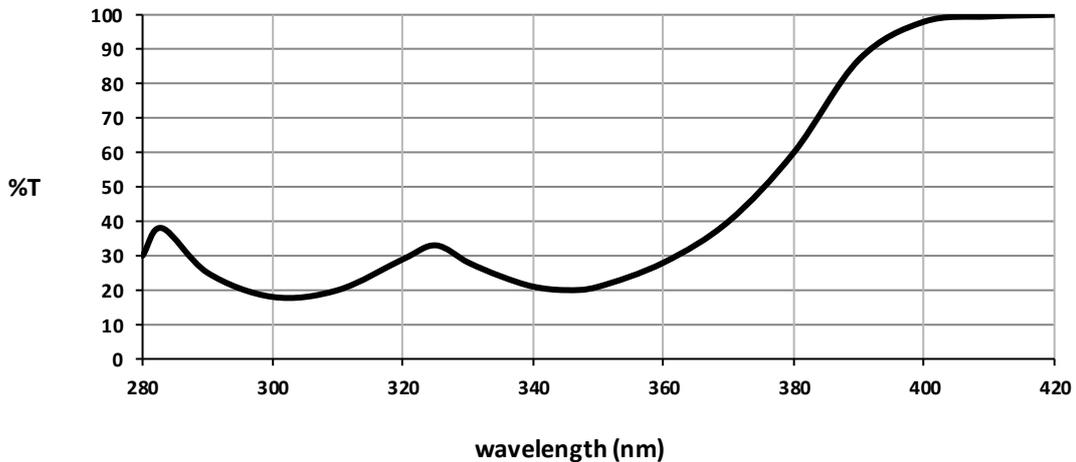

**UNIQ<sup>®</sup> LIGHT 960** is a compound light stabilizer developed specifically for industrial coating, which is the blend product of UV absorber and hindered amine light stabilizer. It can absorb wavelength at the range of 280nm to 370nm. With its excellent heat stability and high temperature resistance makes it suitable for high bake temperatures or extreme environmental conditions. Its broad UV absorption allows efficient protection of light sensitive base coats or substrates such as wood and plastics. It needs to be diluted with cosolvent when applied in waterborne system, adding under stirring conditions.

## Special Features

- Blend Liquid
- Broad UV absorption
- High temperature resistance

## Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Protective coatings	<input type="checkbox"/>

Highly recommended   
recommended

## Product Specification

Solid Content	100 %
Density 20°C	0.98 g/cm <sup>3</sup>
Viscosity	10,000 mPa s
Appearance	Light yellowish liquid

## Addition levels

Amount of solid additive based on resin:

- Wood coatings 1 – 3 %
- OEM/Refinish coatings 2 – 5 %
- Industrial coatings 1 – 3 %

## Packaging

- 25 kg
- 190 kg

## Shelf life

**UNIQ<sup>®</sup> LIGHT 960** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture.