


# UNIQ®SPERSE 715 S

Wetting and dispersing agent for inorganic pigments

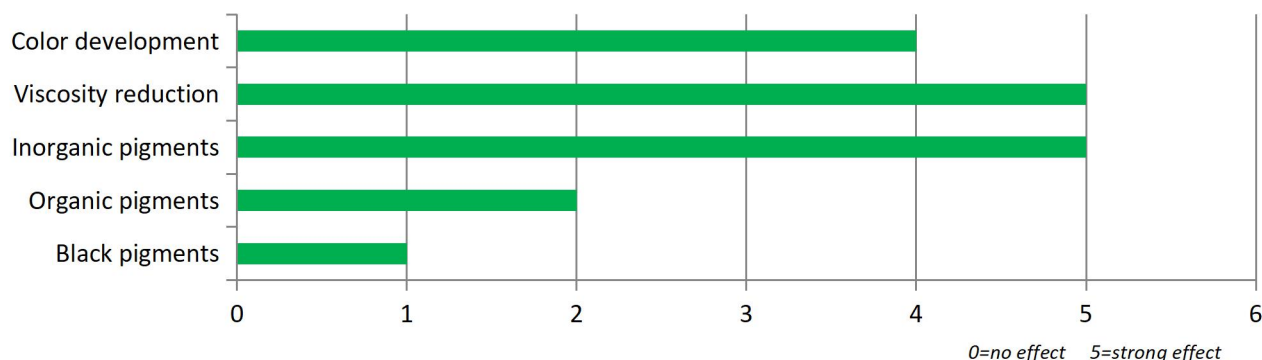

**UNIQ®SPERSE 715 S** is a wetting and dispersing additive for solvent based coating systems. The dispersant is especially suitable for inorganic pigments, extender and filler pigments. For TiO<sub>2</sub> millbase viscosities will be strong reduced, higher pigment loading in the mill base process can be easily achieved.

## Special Features

- Solvent based applications
- Suited for TiO<sub>2</sub>, inorganic- and filler pigments
- Strong viscosity reduction resulting in increased pigment loading
- Improves the hiding power of TiO<sub>2</sub> and optical whiteness
- Improves gloss and tinting strength

## Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>

highly recommended   
recommended

## Product Specification

Active ingredients	100.0 %
Density 20°C	1.13 g/cm <sup>3</sup>
Acid value	105 mg KOH/g
Appearance	Slight yellowish clear liquid

## Addition levels

Amount of solid additive based on pigment (SOP):

- Inorganic pigments: 2 - 5%
- Titanium dioxides: 1 - 3%

The above recommended levels can be used for orientation and needs to be optimized by testing.

## Packaging

- 25 kg
- 200 kg

## Shelf life

**UNIQ®SPERSE 715 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.