


UNIQ[®] SPERSE 764 S

W&D agent to prevent flooding and floating of pigments

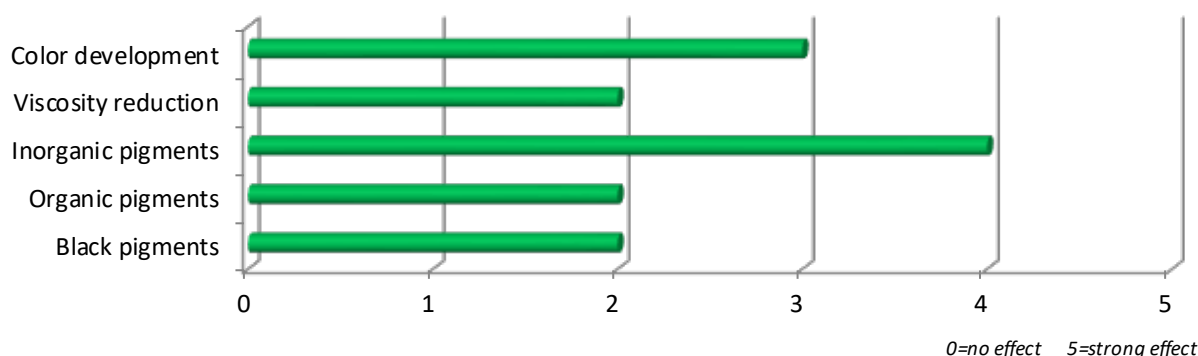

UNIQ[®] SPERSE 764 S is controlled flocculating wetting and dispersing additive for solvent-borne, medium-polarity to high-polarity coatings to prevent the flooding/floating of titanium dioxide in combination with colored pigments. Silicone free.

Special Features

- Solvent application
- Prevention of flooding and floating
- Reduce dispersion time
- Stabilization of the pigment dispersion
- Decrease pigment sedimentation
- Help orientation of matting agent and aluminum
- Silicone free

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	■
Protective coatings	■

highly recommended ■

recommended □

Product Specification

Active ingredients	50.0 %
Solvent	Hydrocarbons C9 aromatics/Xylene/MIBK
Density 20°C	0.95 g/cm ³
Acid value	140.0 mg KOH/g
Color	Max.12
Appearance	Brownish liquid

Addition levels

Amount of solid additive based on pigment (SOP):

- Inorganic pigments: 1.5 – 5 %
- Titanium dioxides: 0.2 – 2 %
- Organic pigments: 5 – 10 %

The above recommended levels can be used for orientation and needs to be optimized by testing.

Packaging

- 25 kg
- 180 kg

Shelf life

UNIQ[®] SPERSE 764 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.