


# UNIQ<sup>®</sup> SPERSE 770 U

Low molecular weight dispersant for solvent based

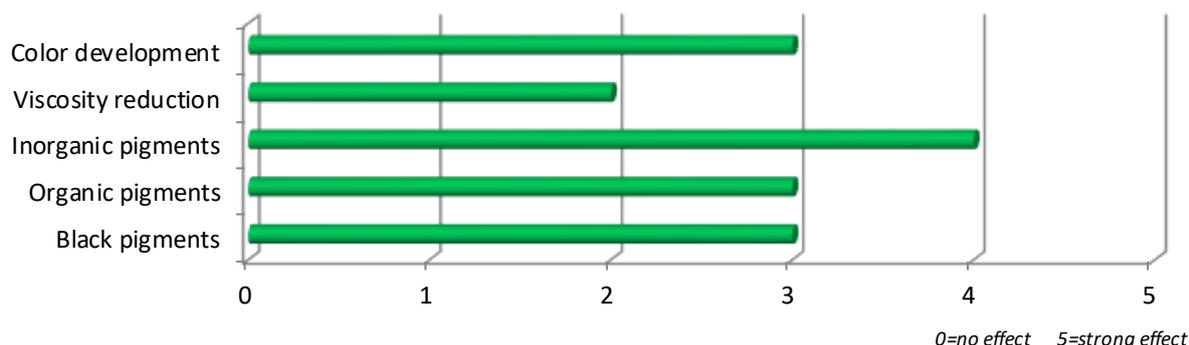

UNIQ<sup>®</sup> SPERSE 770 U is wetting and dispersing additive for solvent-borne architectural coatings and pigment concentrates on the basis of alkyd resins. The additive is suitable for all pigments

## Special Features

- Dispersant for organic and inorganic pigment, especially inorganic pigment
- Prevention of flooding and floating
- Reduce dispersion time
- Suitable for low polarity system like TPA and NC

## Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	□
Can/coil coatings	□
Protective coatings	□

highly recommended ■  
recommended □

## Product Specification

Active ingredients	100 %
Density 20°C	0.95 g/cm <sup>3</sup>
Amine value	80.0 mg KOH/g
Color	Max.13
Appearance	Brownish liquid

## Addition levels

Amount of solid additive based on pigment (SOP):

- Inorganic pigments: 0.2 - 5%
- Titanium dioxides: 1 - 3%
- Organic pigments: 2 - 5%
- Bentonites 15 - 25%

The above recommended levels can be used for orientation and needs to be optimized by testing.

## Packaging

- 25 kg
- 190 kg

## Shelf life

UNIQ<sup>®</sup> SPERSE 770 U should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.