


# UNIQ<sup>®</sup>FOAM 295 W

Water based silicone defoamer

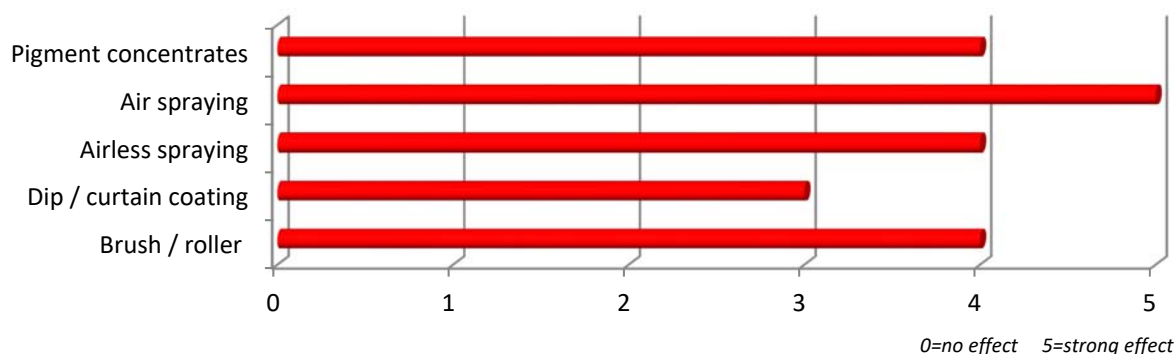

**UNIQ<sup>®</sup>FOAM 295 W** is a strong defoamer based on organic silicon, this product can be used for grinding and spraying conditions. Working well against micro-foam, therefore also well suited for self-leveling water based epoxy flooring systems and pigment concentrates.

## Special Features

- Water based applications
- Strong defoamer for grinding conditions
- Long term persistent
- Silicone based
- Heat stable

## Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	□
Can/coil coatings	□
Pigment concentrates	■
Protective coatings	■
Industrial coatings	■

highly recommended ■  
recommended □

## Product Specification

Density 20°C	1.01 g/cm <sup>3</sup>
Refractive index	1.4480-1.4580
Color	Max. 1
Appearance	Slightly turbid liquid

## Addition levels

- Based on total formulation: 0.1 – 1.0 %

Most of time 0.3% is sufficient, but for airless application higher dosage might be required.

## Packaging

- 25 kg
- 190 kg

## Shelf life

**UNIQ<sup>®</sup>FOAM 295 W** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.