


UNIQ[®]FLOW 386 S

Polyacrylate based leveling agent for solvent based applications

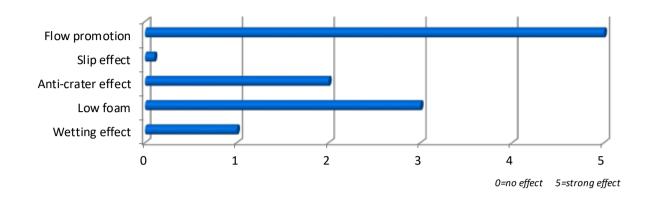

UNID[®]**FLOW 386 S** is a cost effective acrylic leveling agent for solvent based coating systems showing excellent compatibility and good long wave leveling performances. In addition it increases the gloss.

Special Features

- Solvent based applications
- Improves leveling
- Excellent compatibility,
- Suitable for high gloss (clear) coating
- Does not interfere intercoat adhesion
- Silicone free

Application

-	
Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Protective coatings	
Industrial coatings	

Based on total formulation:

highly recommended ■ recommended □

0.1 - 1.0%

Product Specification

Active ingredients	52 %
Solvent	PMA
Density 20 °C	1.0 g/cm ³
Color	Max. 1
Appearance	Clear colorless liquid

Packaging

- 25 kg
- 180 kg

Addition levels

Shelf life

LNIC[®]**FLOW 386 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

www.uniqchem.com Info@uniqchem.com

Regional headquarters

 UNIQ®FOAM, UNIQ®FLOW, UNIQ®W ET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET

 This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor. No liabilities, including those for patent rights, can be derived from this fact for individual cases.

 This datasheets replaces all previous issues – Printed in UK
 © Copyright UNIQCHEM (UK) CO., LTD.

 Asia:
 UNIQCHEM Shanghai Co., Ltd.
 Tel: +86 21 5433 6480
 asia@uniqchem.com

 EMEA:
 UNIQCHEM Shanghai Co., Ltd.
 Tel: +49 5921 853 7428
 au@uniqchem.com